


Range: Thermostatic mixing valves

Ref: 29008 - Minitherm - Thermostatic mixing valve for single point of use with inline arrivals F3/8"

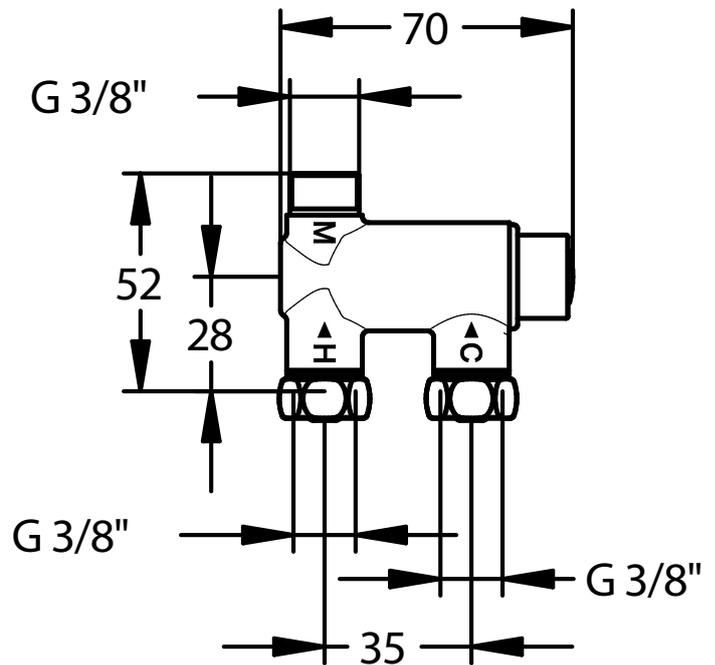

> Working pressure:

- 1 to 5 bar
- Max unbalanced pressure : 2:1

> Flow:

- Flow rate : 2l/min to 10l/min

> Hydraulic supply:

- In-line hot and cold water inlets
- Hot water inlet F3/8" (red ring)
- Cold water inlet F3/8" (blue ring)
- Mixed water outlet M3/8"

> Compatibility:

- For 1 washbasin tap (or 2 according to the flow rate)
- For 1 shower tap

> Material and colour finish:

- Chrome-plated brass body

> Thermal resistance:

- Resistant to a temperature of 80°C for 30-minute-thermal-shocks

> Safety:

- Anti-scald safety function: flow is immediately stopped if the cold water is cut off

> Temperature settings:

- Preset temperature: 38°C (100°F), adjustable by professionals from the hottest to the coldest network temperature
- Recommended temperature setting range: 34° to 45°C (93° to 113°F)
- Hot water supply temperature: 55 to 65°C (131° to 149°F)
- Cold water supply temperature: 5 to 25°C (41° to 77°F)
- Differential minimum temperature: 15°C (59°F) between hot inlet and mixed water outlet
- Thermal disinfection position: up to 80°C (176°F)

> Delivered with:

- Filter gaskets
- NF Check valves

> Standards & approvals :

- 200-hour neutral salt spray resistant (NSS) in accordance with ISO 9227
- Brass body in accordance with EN 1982, EN 12164, EN 12156
- UBA List brass

Ce document n'est pas contractuel ; nous nous réservons le droit de modifier les caractéristiques de nos produits sans préavis. Toutes nos marques et tous modèles sont déposés.

