

[Home \(/en/\)](#) / [Products \(/en/products\)](#) / [Safety & Filling \(/en/products/safety-filling\)](#)

/ [Other Safety Devices \(/en/products/safety-filling/other-safety-devices\)](#) / 500 - Thermostatic Mixing Valve



## 500 - Thermostatic Mixing Valve



Thermostatic Mixing Valve to ensure a stable mixed Water for domestic Water Installations

between 30°C and 70°C (86°F to 158°F)

Pressure Rating PN 14 (203 psi)

Temperature Rating max. 85°C (185°F) water


Also available for solar applications

Dezincification resistant brass body

3 x Female Ends 3/4"

**?** ASK A QUESTION ABOUT THIS PRODUCT

## Description

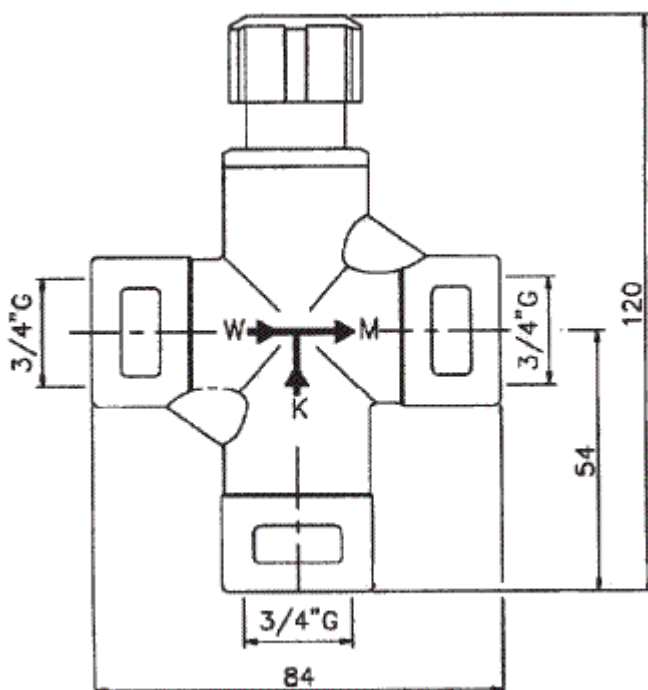

Dimensions in mm

500

50006


[BACK TO: OTHER SAFETY DEVICES \(/EN/PRODUCTS/SAFETY-FILLING/OTHER-SAFETY-DEVICES\)](#)

[PRIVACY POLICY \(/EN/PRIVACY-POLICY-INGLESE\)](#)

| [PRIVACY POLICY ITALIANO \(/EN/PRIVACY-POLICY-ITALIANO\)](#)

| [COOKIES POLICY \(/EN/COOKIES-POLICY\)](#)

| [SITE MAP \(/EN/MAPPA-SITO-INGLESE\)](#)

 [\(HTTP://WWW.LWDESIGN.IT\)](http://www.lwdesign.it)