


Range: ALPA

Ref: 35303 - Monobloc timed-flow mixer tap for shower, N, 150 mm inlet centers

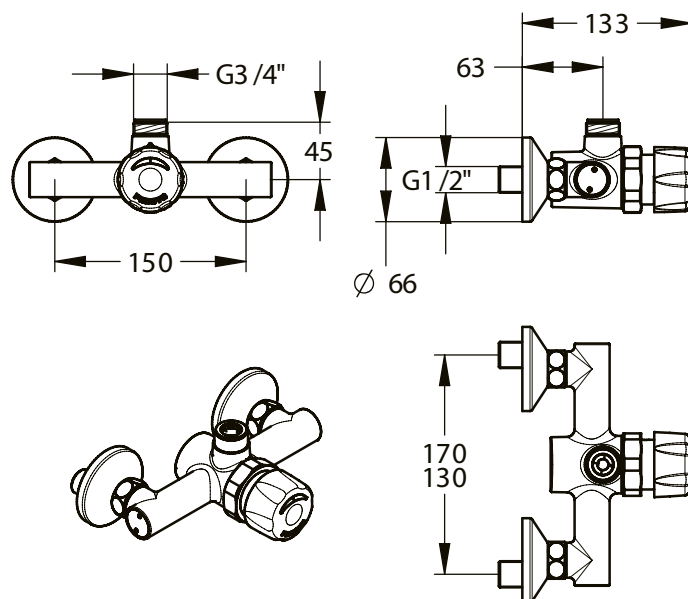

> Working pressure :

- 1 to 5 bar

> Flow :

- 8 l/min with integrated flow regulator
- Anti-water-hammering design

> Flow time :

- 30 seconds (- 10 / + 5 secondes)

> Hydraulic supply :

- 150 mm inlet centres
- Eccentric connectors M 3/4" (20x27) x M 1/2" (15x21) adjustable for centres from 130 to 170mm
- On ALPA with NF Check valves

> Material and colour finish :

- Chrome-plated molded metal knob
- Chrome-plated monobloc brass body

> Thermal resistance :

- Resistant to a temperature of 75°C for 30-minute-thermal-shocks

> Safety:

- Maximum temperature limitation with adjustable temperature stop

> Delivered with:

- 2 Filter gaskets
- 2 Eccentric connectors
- 2 Rosettes
- Instruction manual

> Standards & approvals :

- Brass body in accordance with EN 1982, EN 12164, EN 12156
- Molded chrome-plated body in accordance with EN 12540
- 200-hour neutral salt spray resistant (NSS) in accordance with ISO 9227

