


Range: PRESTO DL 400 SE®

Ref: 27400 - Timed flow single tap for shower single tap with straight stop valve

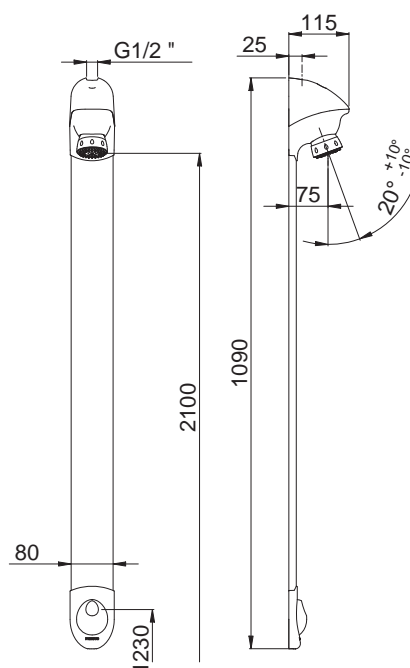

> Working pressure :

- 1 to 5 bar

> Flow :

- 8l/min at 3 bar with integrated flow limiter (+ additional 6l/mn limiter)
- Anti-water-hammering design
- Fixed shower head with anti-limescale spikes

> Flow time :

- 30 seconds (± 5 sec.)

> Hydraulic supply :

- G 1/2" (15x21) Top water inlet with straight stop valve
- For cold or premixed water

> Material and colour finish :

- Injected molded metal body and cover
- Extruded cover in aluminium (magnesium-silicon alloy 6060)

> Thermal resistance :

- Resistant to a temperature of 75°C for 30-minute-thermal-shocks

> Security :

- Patented anti-blocking "S®" system to avoid the water to flow continuously

> Delivered with :

- VBA screws and nylon plugs
- Additional 6l/mn limiter
- M G 1/2" - FG3/4" stop valve and filter
- Instruction manual

> Standards & approvals :

- Acoustic class I
- Molded chrome-plated body in accordance with EN 12540
- 200-hour neutral salt spray resistant (NSS) in accordance with ISO 9227

