



## TECHNICAL DATASHEET

### HEALTHCARE TAPWARE

## MASTERMIX thermostatic mixer for sink and maternity wards - Deck-mounted with pull-out spray head - 75714




### Benefits of the product

- Suitable for maternity wards and day nurseries
- MASTERMIX PATENTED RANGE
- Ingenious combination of a specific ceramic cartridge and thermostatic cartridge: safety and reliability.
- No cross-connection between hot water and cold water.
- Without check-valves
- Body with smooth interior: limits the risk of bacterial proliferation
- Dual safety temperature limiter (38°C and 41°C) and adjustment of maximum flow limiter
- Temperature stability and anti-scalding safety
- Quick and easy Installation and maintenance.
- Safe thermal shock: only accessible by technical staff
- Pull-out spray head with 2 jets

### Description

Sink thermostatic mixer for baby bath without mixing chamber under pressure (avoiding DHW and DCW intercommunication upstream of the shutter), with MASTERMIX conception, equipped with ergonomic swivel knobs and with a pullout spray head, in chrome-plated zamak. Temperature knob with dual temperature limiter 38°C and 41°C. Safety temperature unlocking for thermal shock, and accessible only by technical staff, without dismantling the knob. M8X1 hoses LN G'3/8 Lg 360 mm, with filter seals. Adjustable maximum flow rate 6/9/12L / min by the technical manager, temperature adjustable from 18° to 41°C. Flow rate knob in chrome-plated zamak. Unique and patented antiintercommunication hot water (HW) and cold water (CW) system: removal of check valves on the HW and CW mixer inlets. Combination of a compliant French Norm EN1111 thermostatic cartridge and ceramic cartridge. Swivel spout - Projection 200 mm - Height to nozzle: 231 mm. 3-year warranty for thermostatic cartridge and 10-year warranty for the tap. REF: 75714, MASTERMIX technology, brand SANIFIRST or equivalent approved

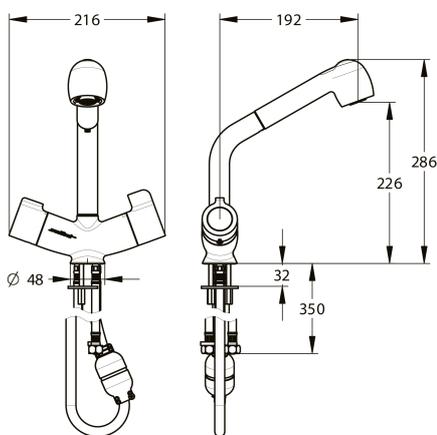



## TECHNICAL DATASHEET

### Additional Information

<b>Product reference</b>	75714
<b>Previous reference</b>	NC
<b>Brand</b>	Sanifirst
<b>Warranty</b>	10 years against manufacturing defect / 3 years for the thermostatic cartridge
<b>Special feature 2</b>	Tabletop
<b>Special feature 3</b>	Thermostatic mixer
<b>Height to nozzle (mm)</b>	231
<b>Projection (mm)</b>	200
<b>Clip-on spout</b>	No
<b>Drainage</b>	Without drainage
<b>Lever</b>	Chrome-plated zamak knobs and pull-out spray head
<b>Connection</b>	M8x1 hose EP G'3/8 Lg 360
<b>Flow rate</b>	Factory settings: 6 L/min at 3 bar
<b>Minimum pressure</b>	1 bar
<b>Recommended pressure</b>	3 bar with a pressure differential less than 1 bar
<b>Maximum pressure</b>	5 bar
<b>Cartridge</b>	Ceramic cartridge and thermostatic cartridge compliant to French Norm EN 1111
<b>Thermal shock</b>	Yes