
TECHNICAL DATA SHEET



Range: PRESTO 5750

Ref: 55132 - Deck-mounted sensor mixer for washbasin with high spout, rotating base, battery



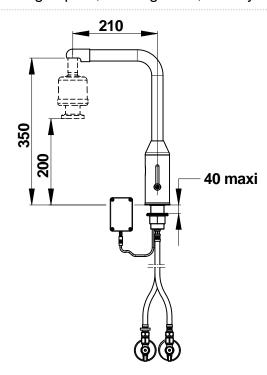

> Working pressure:

• 1 to 5 bar

> Operation:

- Starts and stops automatically by hand detection
 Sensor trigger suitable for PRM, elderly, children and disabled people
 High spout allowing to install a disinfection cartridge

- 6l/min with regulated star-shaped flow straightener (to limit biofilm fixation)
 Anti-water-hammering design

> Hydraulic supply :

F G 3/8" (12x17) hoses

> Power supply:

External 6V CRP2 lithium battery in IP65 waterproof case

> Material and colour finish:

- Chrome-plated brass body
 Chrome-plated brass base
 Smooth spout and body without water nor bacteria retention

> Thermal resistance :

• Resistant to a temperature of 75°C for 30-minute-thermal-shocks

> Security:

- Anti-overflow security time set to 30 seconds preventing the water to flow continuously
 Periodic hygienic 30 seconds duty flush, every 72 hours after last use
 Automatic shutdown of solenoid valve in case of low battery or sensor damage
- > Delivered with:

 - 1 Brass clamping nut
 1 Seal and washer
 2 PEX hoses with 3/8" (12x17) female nut with integrated filters and NF check valves
 2 Stop valves with filters for wall/bracket mounting
 1 Self-adhesive sticker

> Standards & approvals :

- Brass body in accordance with EN 1982, EN 12164, EN 12165
 Resistant to salt spray 200 H (NSS test) in accordance with standard/ NF ISO 9227





















